

Road Luminaire Photometric Data



Description Information

Luminary Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Date: 2017-04-14 08:03:17
Manufacture: xinfang	Shld. Ang(°):	Test Machine:GON-2000
Test Lab: EVERFINE	Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size(W*L*H):0.000m*0.000m*0.000m	Lum. Area(m2):0.000	Lum. W(kg):
Test System: C, γ	Test Step: C=22.5 γ=1.0	Temp.(°C):
		Humidity(%):

Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 8142.894	Luminary Flux(lm): 8142.894	Down Lumens&Percent: 8128.741lm 99.83%
Rated Power(W):	Luminary Efficiency: 100.00%	Up Lumens&Percent: 14.152lm 0.17%
Rated Voltage(V):	Luminary EER(lm/W): 137.782	76° Flash Area(m2):
Tested Power(W): 59.100	Max. Candela(cd): 2663.630	SLI: 0.000
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ=30.0	IES Classification: Type IV
Tested Electrics(V, A, pf):	Half Peak Angle(°): L=-24.2, R=57.9	Longitudinal Classfct: Very Short
Lamp Size(W*L*H):0.000m*0.000m*0.000m	Field Angle(10%Imax): 128.3(°)	Cutoff Classification: Cutoff


Lighting Distribution Diagram

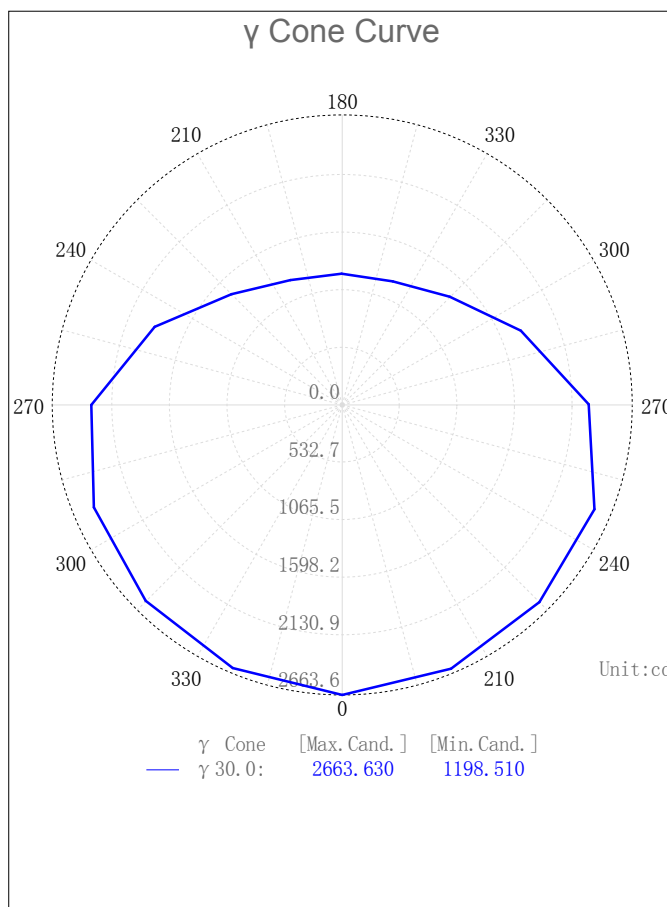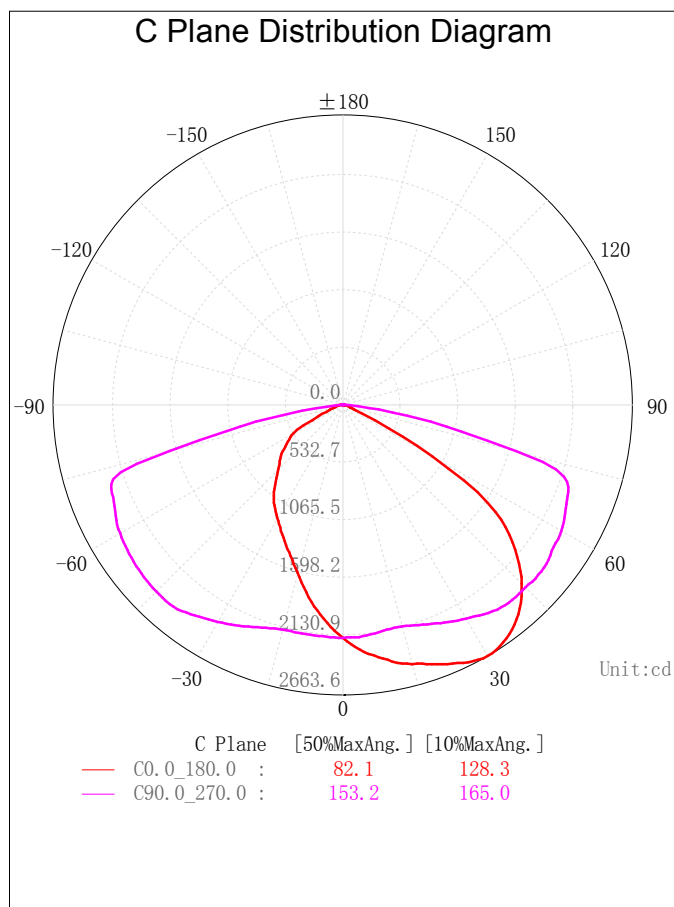

2D Plane Light Intensity Distribution Curve

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

C Plane Distribution Diagram

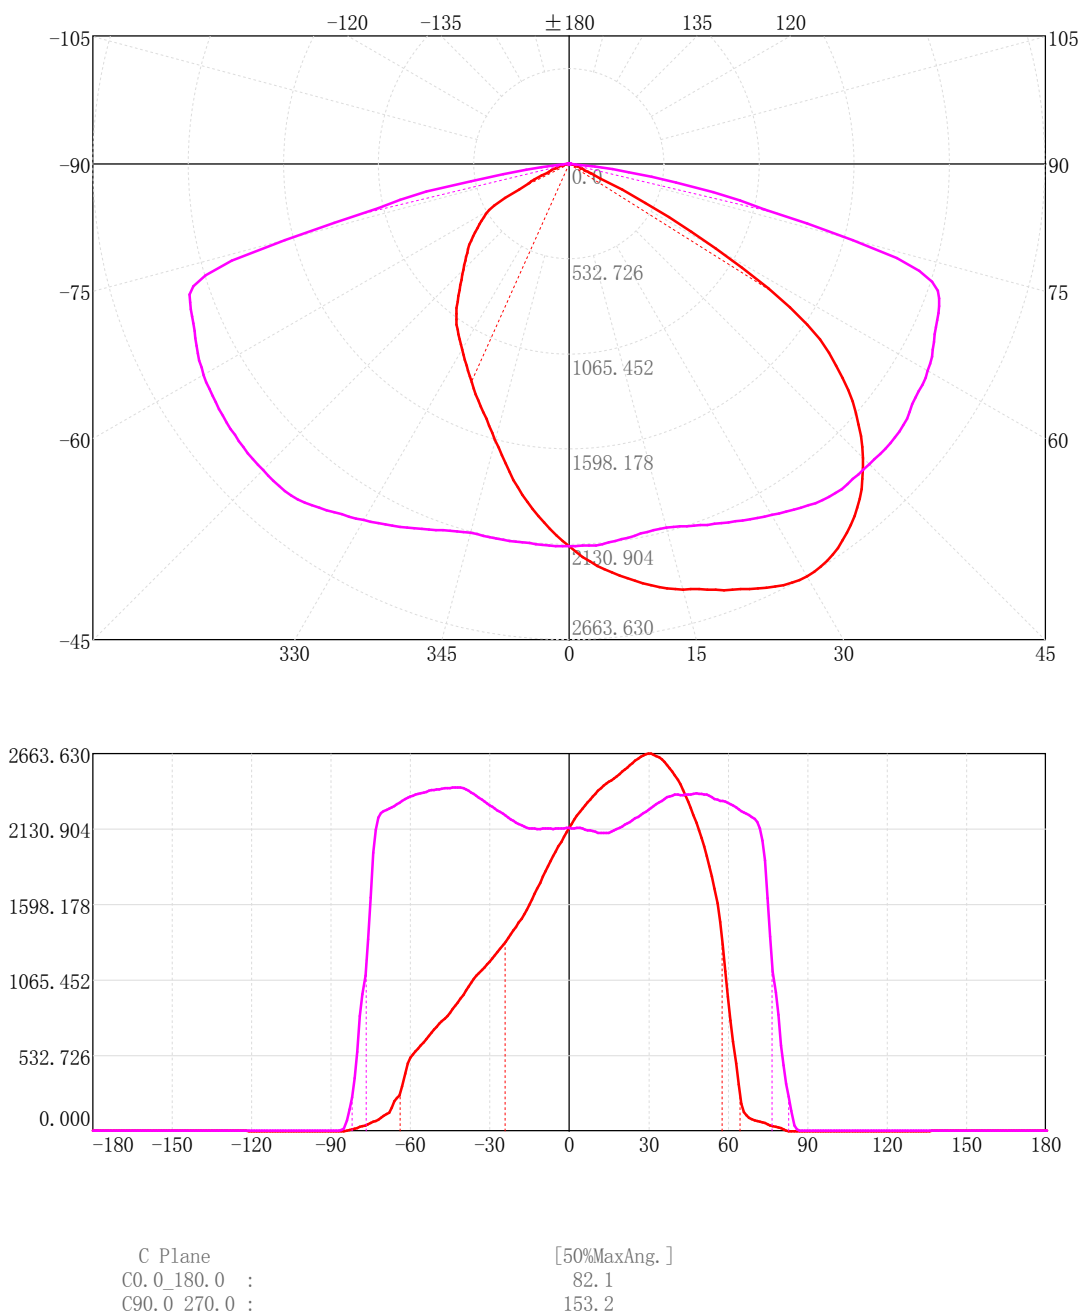


IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

3D Light Intensity Distribution Modal

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

3D Light Intensity Distribution Modal

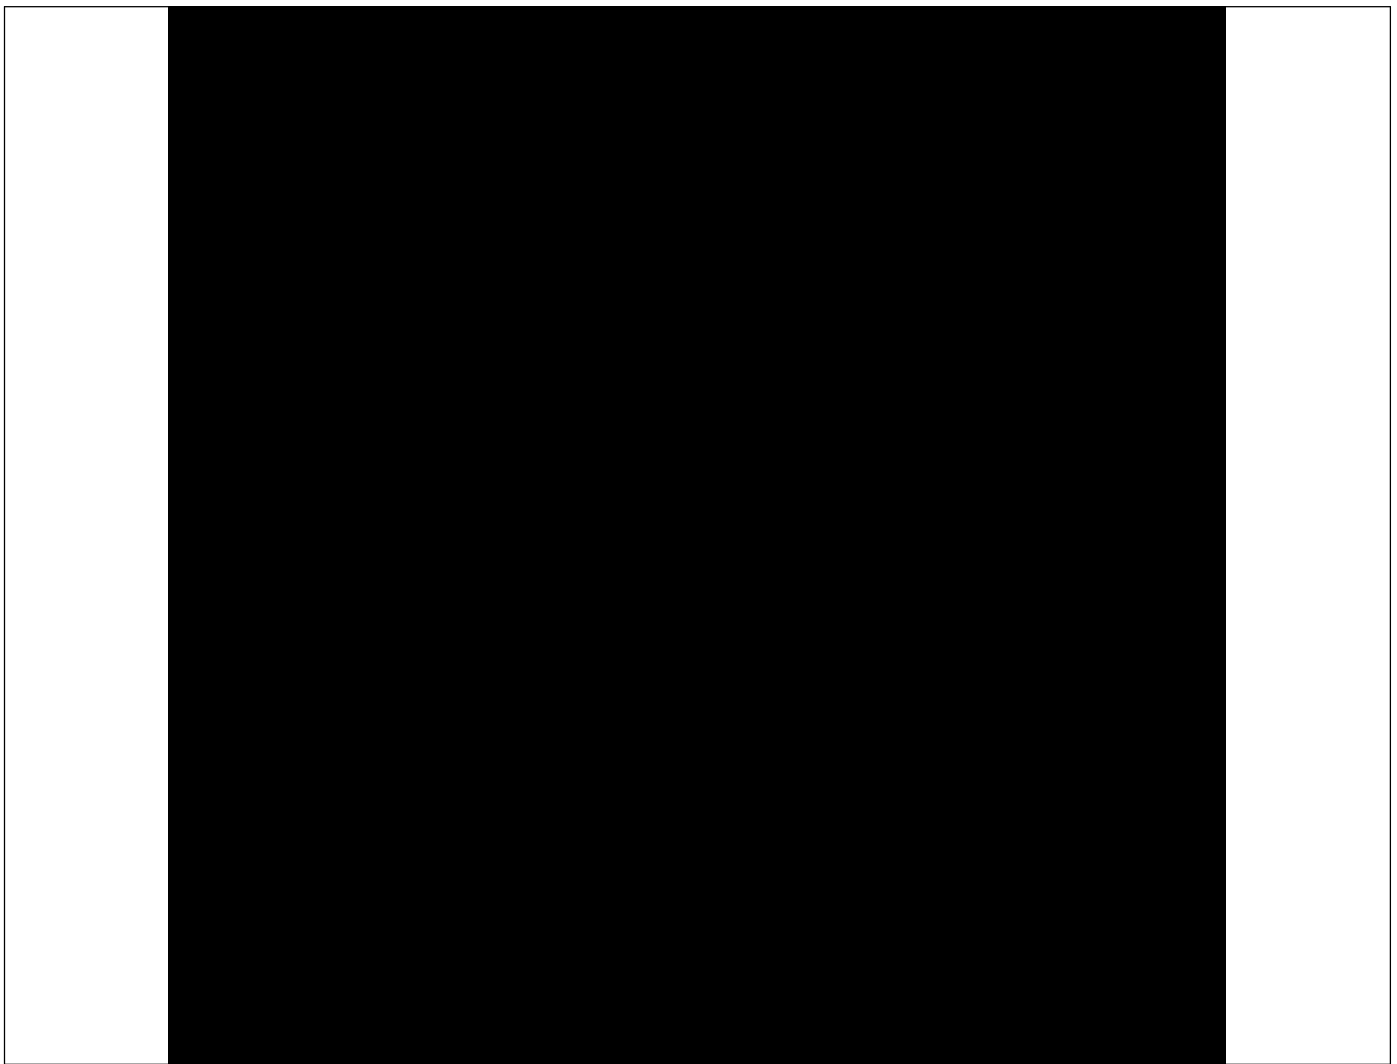

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

Zonal Flux Tabulation

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	2.05	2.05	0.03	0.03	45.0-46.0	148.81	148.81	1.83	1.83
1.0-2.0	6.14	8.18	0.08	0.10	46.0-47.0	150.22	299.02	1.84	3.67
2.0-3.0	10.21	18.40	0.13	0.23	47.0-48.0	151.47	450.50	1.86	5.53
3.0-4.0	14.28	32.68	0.18	0.40	48.0-49.0	152.52	603.01	1.87	7.41
4.0-5.0	18.32	50.99	0.22	0.63	49.0-50.0	153.35	756.36	1.88	9.29
5.0-6.0	22.33	73.33	0.27	0.90	50.0-51.0	153.99	910.36	1.89	11.18
6.0-7.0	26.32	99.64	0.32	1.22	51.0-52.0	154.44	1064.79	1.90	13.08
7.0-8.0	30.26	129.91	0.37	1.60	52.0-53.0	154.68	1219.47	1.90	14.98
8.0-9.0	34.18	164.08	0.42	2.02	53.0-54.0	154.67	1374.14	1.90	16.88
9.0-10.0	38.06	202.14	0.47	2.48	54.0-55.0	154.40	1528.54	1.90	18.77
10.0-11.0	41.90	244.04	0.51	3.00	55.0-56.0	153.85	1682.39	1.89	20.66
11.0-12.0	45.70	289.74	0.56	3.56	56.0-57.0	152.97	1835.36	1.88	22.54
12.0-13.0	49.47	339.20	0.61	4.17	57.0-58.0	151.68	1987.04	1.86	24.40
13.0-14.0	53.20	392.40	0.65	4.82	58.0-59.0	149.88	2136.93	1.84	26.24
14.0-15.0	56.90	449.30	0.70	5.52	59.0-60.0	147.59	2284.51	1.81	28.06
15.0-16.0	60.58	509.89	0.74	6.26	60.0-61.0	144.81	2429.32	1.78	29.83
16.0-17.0	64.25	574.14	0.79	7.05	61.0-62.0	141.54	2570.86	1.74	31.57
17.0-18.0	67.91	642.05	0.83	7.88	62.0-63.0	137.77	2708.63	1.69	33.26
18.0-19.0	71.57	713.62	0.88	8.76	63.0-64.0	133.62	2842.25	1.64	34.90
19.0-20.0	75.21	788.83	0.92	9.69	64.0-65.0	129.28	2971.53	1.59	36.49
20.0-21.0	78.86	867.69	0.97	10.66	65.0-66.0	125.05	3096.59	1.54	38.03
21.0-22.0	82.49	950.18	1.01	11.67	66.0-67.0	120.97	3217.56	1.49	39.51
22.0-23.0	86.10	1036.29	1.06	12.73	67.0-68.0	116.99	3334.55	1.44	40.95
23.0-24.0	89.69	1125.98	1.10	13.83	68.0-69.0	113.33	3447.89	1.39	42.34
24.0-25.0	93.24	1219.22	1.15	14.97	69.0-70.0	109.75	3557.64	1.35	43.69
25.0-26.0	96.76	1315.99	1.19	16.16	70.0-71.0	105.79	3663.43	1.30	44.99
26.0-27.0	100.25	1416.23	1.23	17.39	71.0-72.0	101.49	3764.91	1.25	46.24
27.0-28.0	103.68	1519.91	1.27	18.67	72.0-73.0	96.86	3861.77	1.19	47.43
28.0-29.0	107.05	1626.96	1.31	19.98	73.0-74.0	91.75	3953.52	1.13	48.55
29.0-30.0	110.35	1737.31	1.36	21.34	74.0-75.0	85.52	4039.04	1.05	49.60
30.0-31.0	113.56	1850.87	1.39	22.73	75.0-76.0	77.30	4116.33	0.95	50.55
31.0-32.0	116.68	1967.56	1.43	24.16	76.0-77.0	67.51	4183.84	0.83	51.38
32.0-33.0	119.71	2087.27	1.47	25.63	77.0-78.0	58.20	4242.04	0.71	52.09
33.0-34.0	122.65	2209.92	1.51	27.14	78.0-79.0	49.38	4291.42	0.61	52.70
34.0-35.0	125.51	2335.42	1.54	28.68	79.0-80.0	38.84	4330.26	0.48	53.18
35.0-36.0	128.24	2463.67	1.57	30.26	80.0-81.0	28.41	4358.67	0.35	53.53
36.0-37.0	130.86	2594.53	1.61	31.86	81.0-82.0	20.28	4378.95	0.25	53.78
37.0-38.0	133.36	2727.89	1.64	33.50	82.0-83.0	13.75	4392.71	0.17	53.95
38.0-39.0	135.71	2863.60	1.67	35.17	83.0-84.0	8.57	4401.28	0.11	54.05
39.0-40.0	137.94	3001.54	1.69	36.86	84.0-85.0	4.41	4405.69	0.05	54.10
40.0-41.0	140.04	3141.58	1.72	38.58	85.0-86.0	1.64	4407.33	0.02	54.12
41.0-42.0	142.00	3283.58	1.74	40.32	86.0-87.0	0.53	4407.86	0.01	54.13
42.0-43.0	143.85	3427.44	1.77	42.09	87.0-88.0	0.27	4408.13	0.00	54.13
43.0-44.0	145.62	3573.05	1.79	43.88	88.0-89.0	0.18	4408.30	0.00	54.14
44.0-45.0	147.27	3720.32	1.81	45.69	89.0-90.0	0.12	4408.42	0.00	54.14

IES Road Report


Photometric Filename:60W-120V_IESNA2002.IES

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
90.0-91.0	0.11	0.11	0.00	0.00	135.0-136.0	0.22	0.22	0.00	0.00
91.0-92.0	0.11	0.22	0.00	0.00	136.0-137.0	0.22	0.44	0.00	0.01
92.0-93.0	0.11	0.33	0.00	0.00	137.0-138.0	0.21	0.65	0.00	0.01
93.0-94.0	0.11	0.44	0.00	0.01	138.0-139.0	0.21	0.86	0.00	0.01
94.0-95.0	0.11	0.55	0.00	0.01	139.0-140.0	0.20	1.06	0.00	0.01
95.0-96.0	0.11	0.67	0.00	0.01	140.0-141.0	0.20	1.27	0.00	0.02
96.0-97.0	0.12	0.79	0.00	0.01	141.0-142.0	0.20	1.46	0.00	0.02
97.0-98.0	0.12	0.91	0.00	0.01	142.0-143.0	0.19	1.65	0.00	0.02
98.0-99.0	0.13	1.03	0.00	0.01	143.0-144.0	0.19	1.84	0.00	0.02
99.0-100.0	0.13	1.16	0.00	0.01	144.0-145.0	0.18	2.02	0.00	0.02
100.0-101.0	0.14	1.30	0.00	0.02	145.0-146.0	0.18	2.20	0.00	0.03
101.0-102.0	0.14	1.45	0.00	0.02	146.0-147.0	0.17	2.38	0.00	0.03
102.0-103.0	0.15	1.60	0.00	0.02	147.0-148.0	0.17	2.55	0.00	0.03
103.0-104.0	0.16	1.75	0.00	0.02	148.0-149.0	0.17	2.71	0.00	0.03
104.0-105.0	0.17	1.92	0.00	0.02	149.0-150.0	0.16	2.88	0.00	0.04
105.0-106.0	0.18	2.10	0.00	0.03	150.0-151.0	0.16	3.04	0.00	0.04
106.0-107.0	0.19	2.28	0.00	0.03	151.0-152.0	0.16	3.20	0.00	0.04
107.0-108.0	0.19	2.47	0.00	0.03	152.0-153.0	0.15	3.34	0.00	0.04
108.0-109.0	0.20	2.68	0.00	0.03	153.0-154.0	0.14	3.48	0.00	0.04
109.0-110.0	0.21	2.88	0.00	0.04	154.0-155.0	0.14	3.62	0.00	0.04
110.0-111.0	0.21	3.10	0.00	0.04	155.0-156.0	0.13	3.75	0.00	0.05
111.0-112.0	0.22	3.31	0.00	0.04	156.0-157.0	0.12	3.87	0.00	0.05
112.0-113.0	0.22	3.53	0.00	0.04	157.0-158.0	0.12	3.99	0.00	0.05
113.0-114.0	0.22	3.75	0.00	0.05	158.0-159.0	0.11	4.11	0.00	0.05
114.0-115.0	0.22	3.98	0.00	0.05	159.0-160.0	0.11	4.21	0.00	0.05
115.0-116.0	0.23	4.21	0.00	0.05	160.0-161.0	0.10	4.32	0.00	0.05
116.0-117.0	0.23	4.43	0.00	0.05	161.0-162.0	0.10	4.41	0.00	0.05
117.0-118.0	0.23	4.66	0.00	0.06	162.0-163.0	0.09	4.51	0.00	0.06
118.0-119.0	0.23	4.89	0.00	0.06	163.0-164.0	0.09	4.60	0.00	0.06
119.0-120.0	0.23	5.12	0.00	0.06	164.0-165.0	0.09	4.68	0.00	0.06
120.0-121.0	0.24	5.36	0.00	0.07	165.0-166.0	0.08	4.77	0.00	0.06
121.0-122.0	0.24	5.60	0.00	0.07	166.0-167.0	0.08	4.84	0.00	0.06
122.0-123.0	0.24	5.84	0.00	0.07	167.0-168.0	0.08	4.92	0.00	0.06
123.0-124.0	0.25	6.09	0.00	0.07	168.0-169.0	0.07	4.99	0.00	0.06
124.0-125.0	0.25	6.34	0.00	0.08	169.0-170.0	0.07	5.06	0.00	0.06
125.0-126.0	0.25	6.59	0.00	0.08	170.0-171.0	0.07	5.13	0.00	0.06
126.0-127.0	0.25	6.84	0.00	0.08	171.0-172.0	0.06	5.19	0.00	0.06
127.0-128.0	0.25	7.09	0.00	0.09	172.0-173.0	0.05	5.24	0.00	0.06
128.0-129.0	0.25	7.33	0.00	0.09	173.0-174.0	0.05	5.29	0.00	0.06
129.0-130.0	0.24	7.58	0.00	0.09	174.0-175.0	0.04	5.33	0.00	0.07
130.0-131.0	0.24	7.82	0.00	0.10	175.0-176.0	0.03	5.36	0.00	0.07
131.0-132.0	0.23	8.05	0.00	0.10	176.0-177.0	0.03	5.39	0.00	0.07
132.0-133.0	0.23	8.28	0.00	0.10	177.0-178.0	0.02	5.41	0.00	0.07
133.0-134.0	0.23	8.51	0.00	0.10	178.0-179.0	0.01	5.42	0.00	0.07
134.0-135.0	0.22	8.73	0.00	0.11	179.0-180.0	0.00	5.42	0.00	0.07

Rectangle ISO Lighting Intensity Diagram


Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

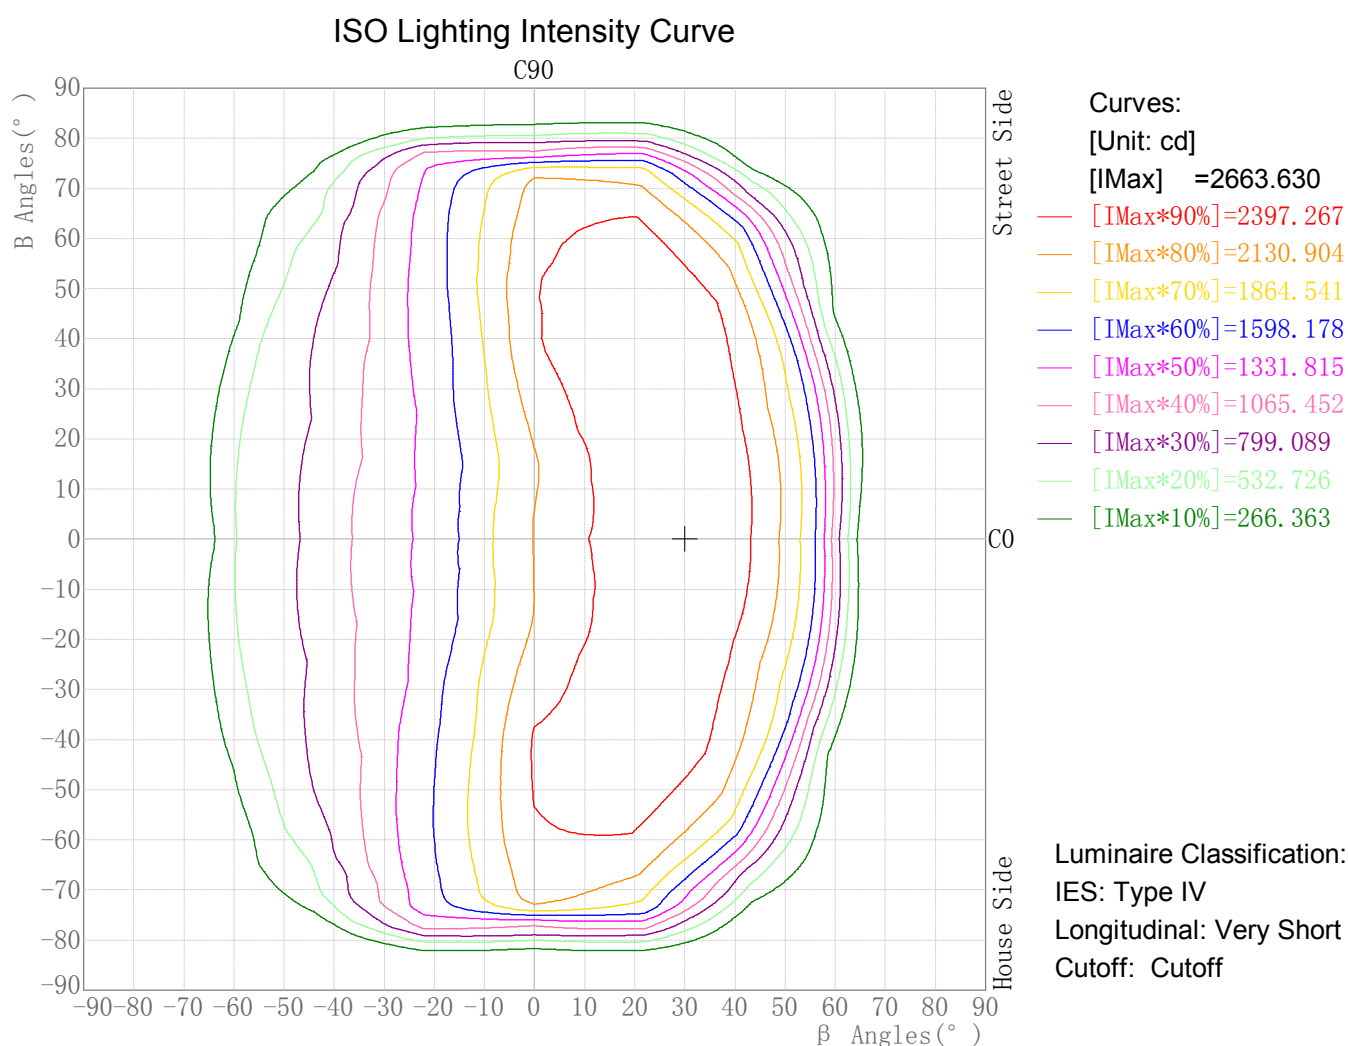

Maximum Light Intensity(cd): 2663.63
Maximum Cand.@Angle: H=30.0°,V=0.0°

Round ISO Lighting Intensity Diagram


Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

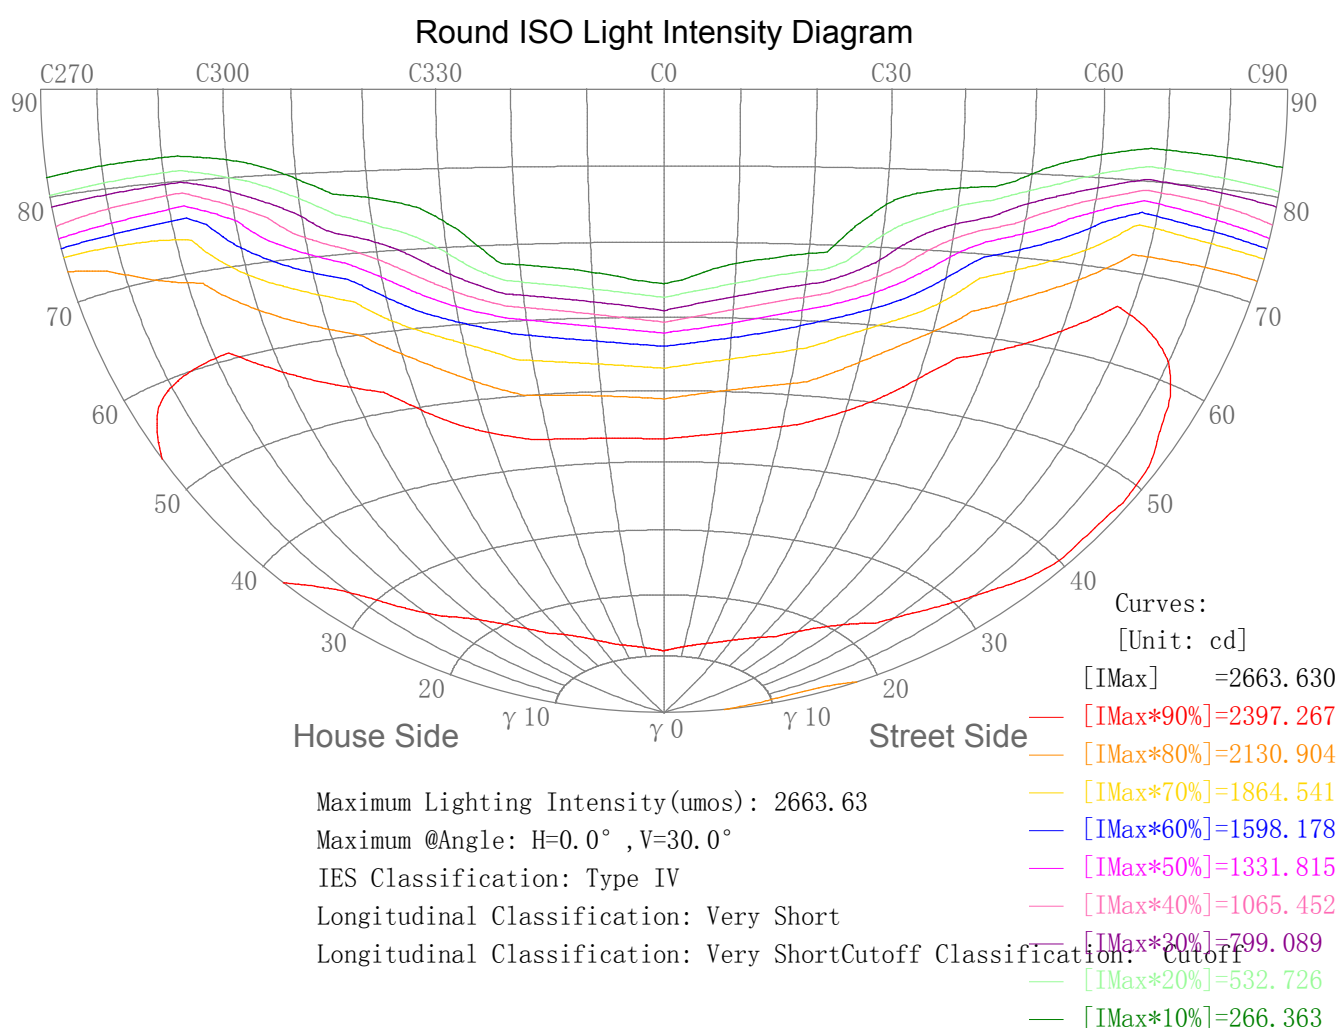

Plane ISO-Illuminance Diagram

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

Plane ISO-Illuminance Curve

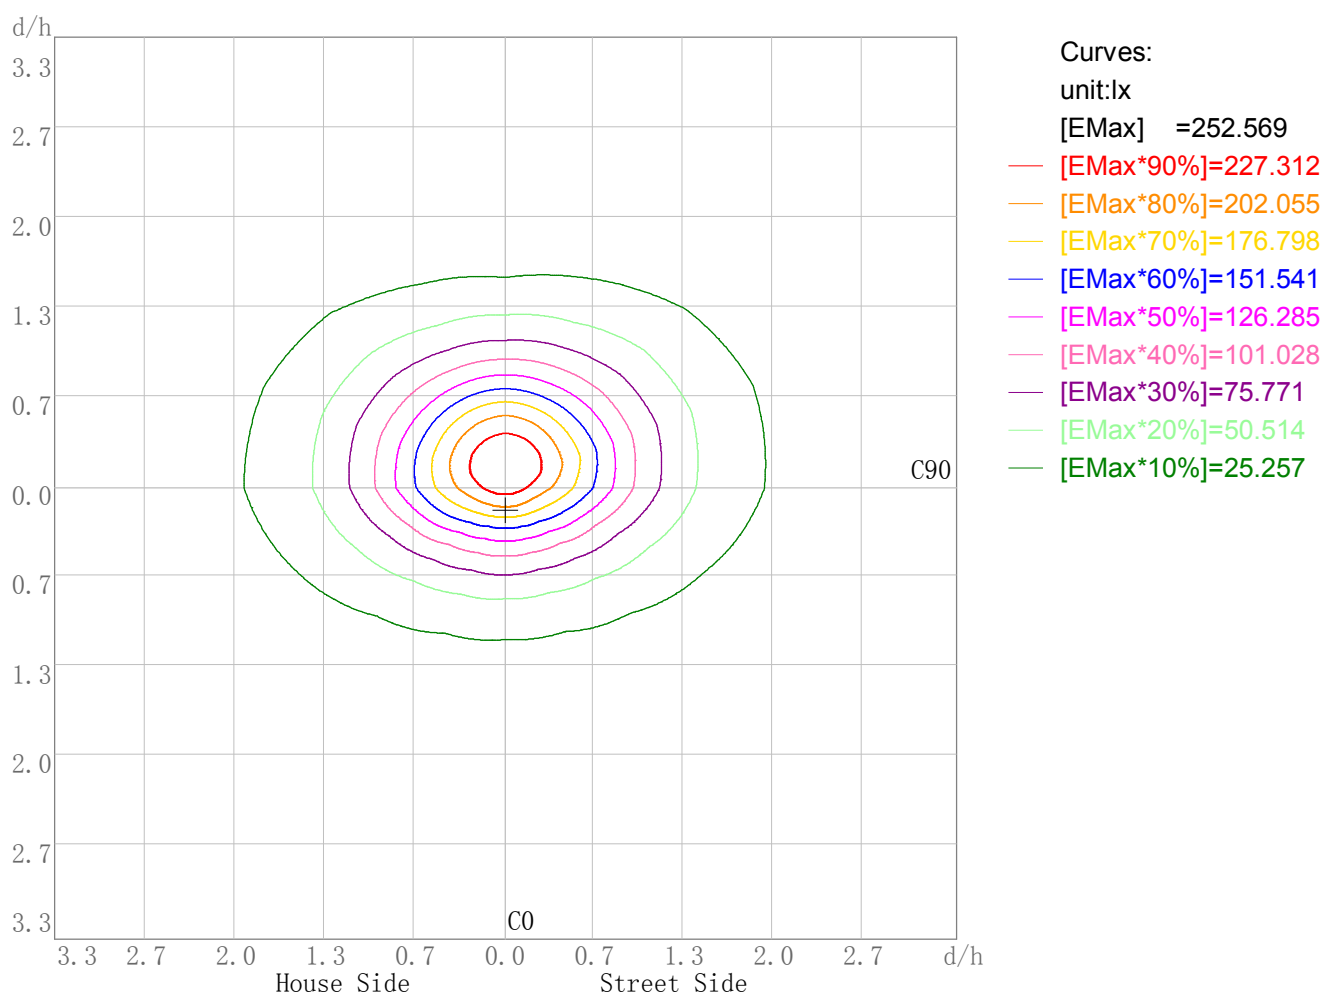

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 252.57
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.2


IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

3D Plane ISO Illuminance Diagram

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

3D Plane Illuminance Modal

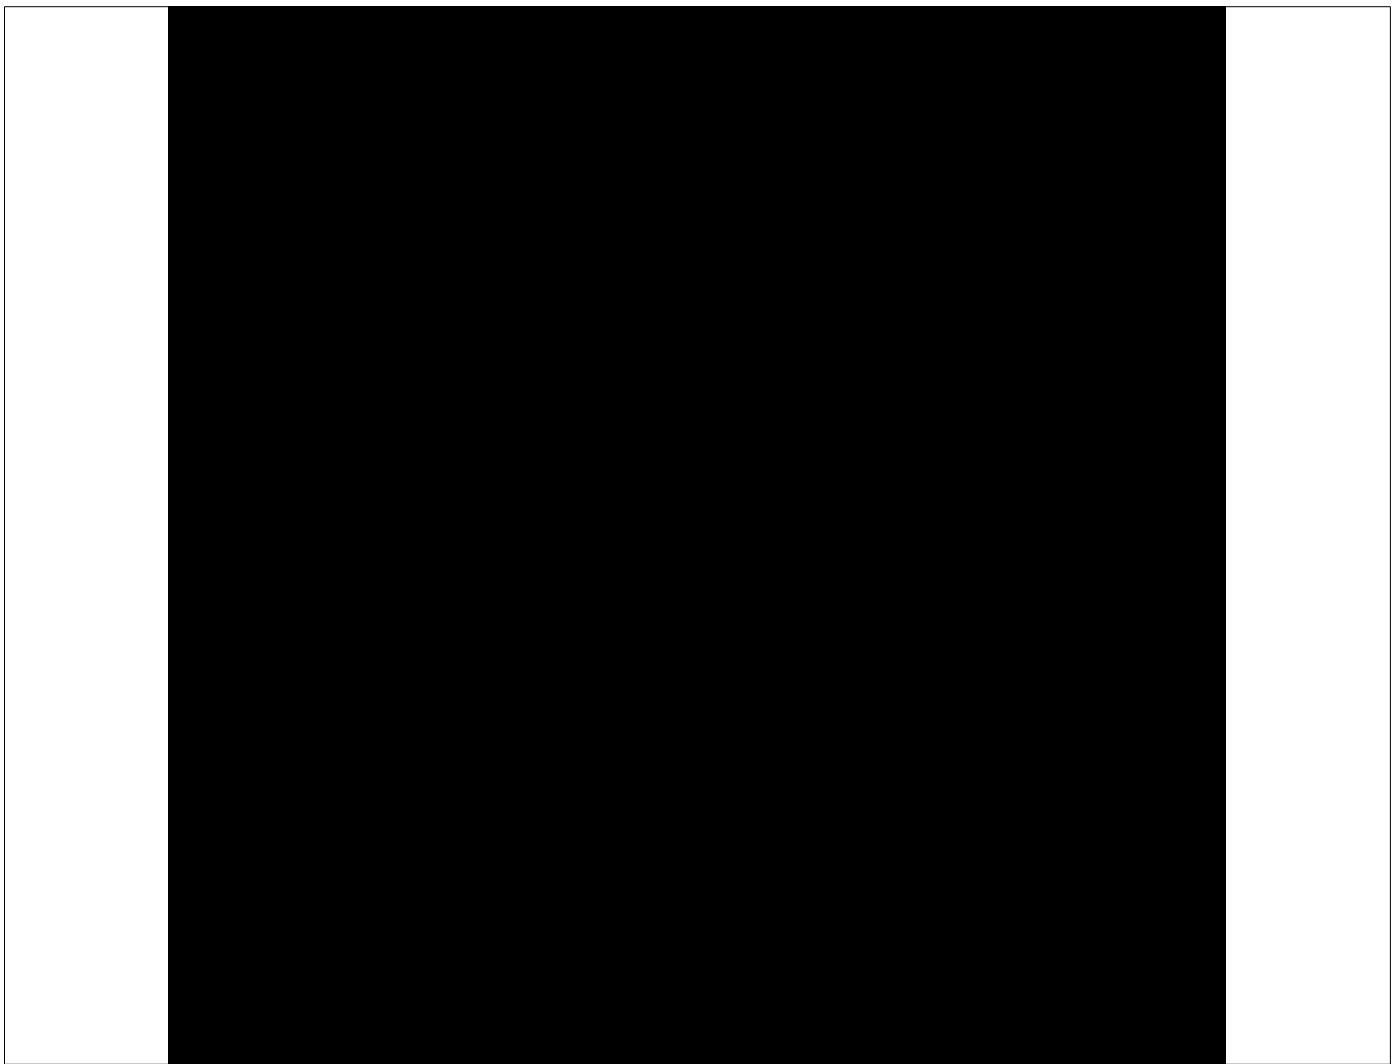


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

Space ISO Illuminance Curve

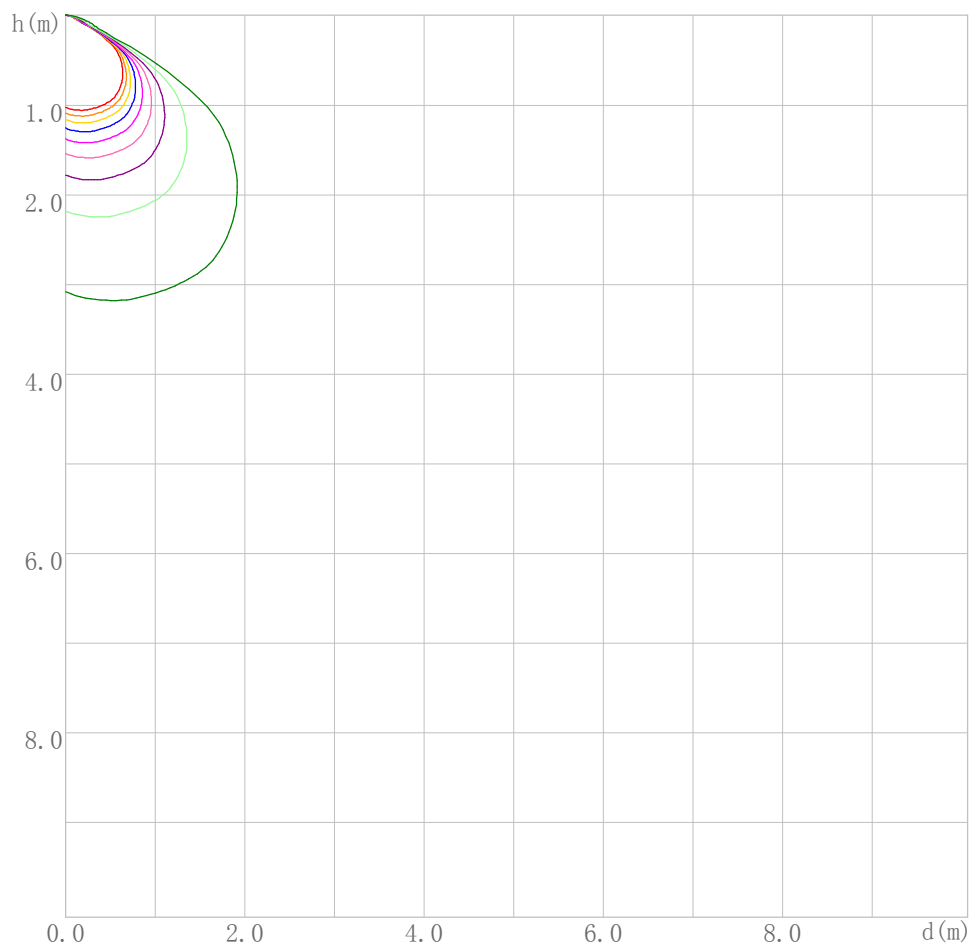


- Curves:
 [Unit: lx]
 [EMax] =2272.939
- [EMax*90%]=2045.645
 - [EMax*80%]=1818.351
 - [EMax*70%]=1591.057
 - [EMax*60%]=1363.763
 - [EMax*50%]=1136.469
 - [EMax*40%]=909.175
 - [EMax*30%]=681.882
 - [EMax*20%]=454.588
 - [EMax*10%]=227.294

Space Plane Maximum Illuminance and @Angle:2272.94lx,9.0deg
 Plane Maximum Lighting Intensity and @Angle:2663.630cd,0deg

Illuminance-Distance Diagram

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17


Illuminance-Distance Curve

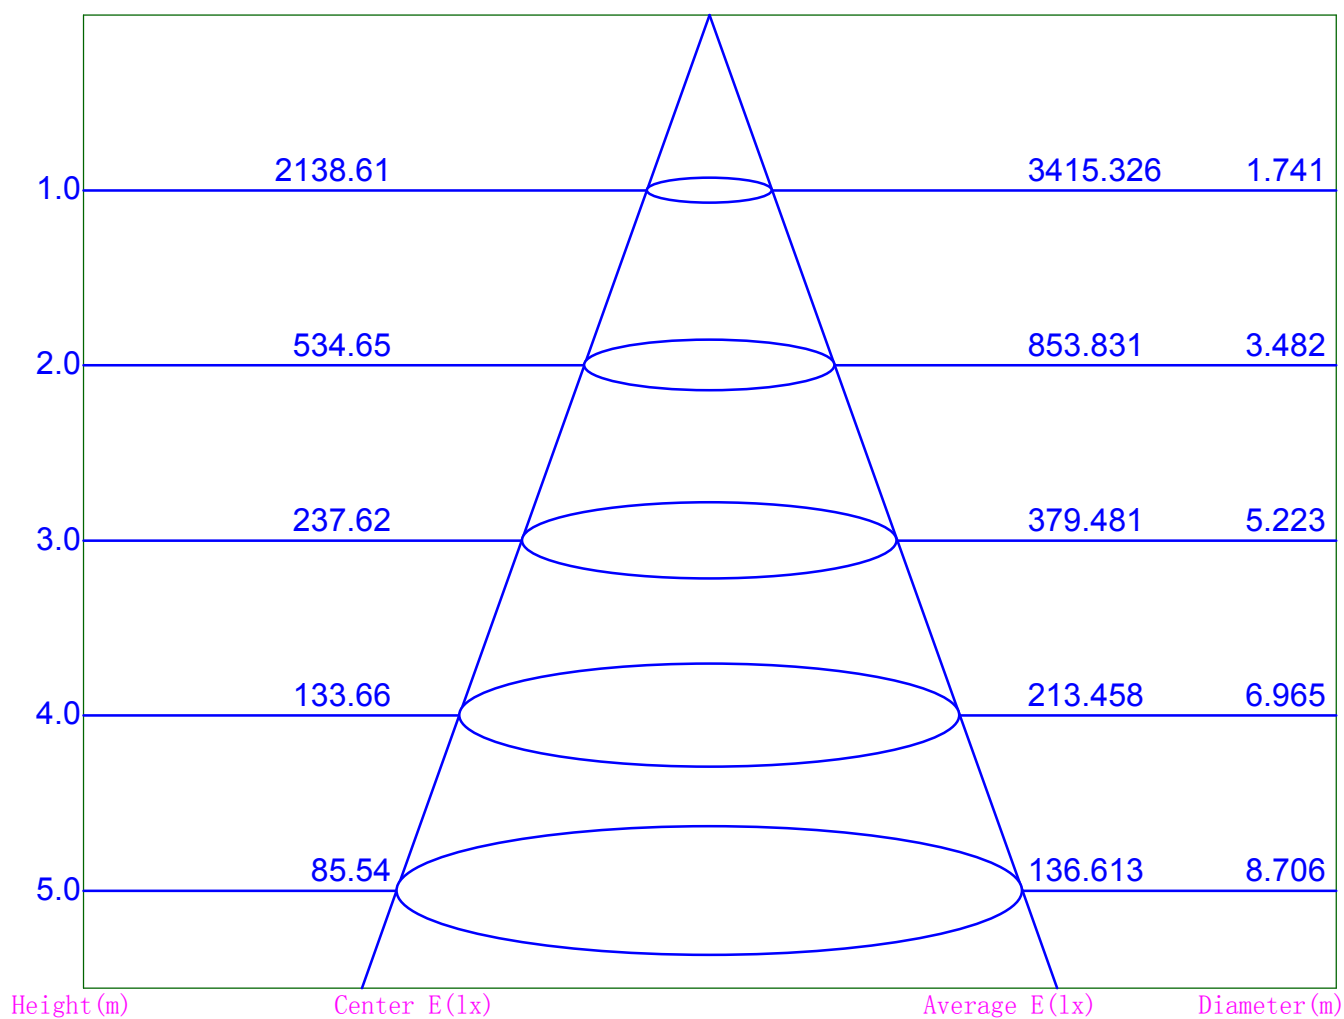

Beam Angle:82.1

Road Coefficient of Utilization Curves

Lum. Name:	Lum. Catalog:	Test ID: 2017-04-14
Lamp Name: 60W	Lamp Catalog:	Test Lab: EVERFINE
Manufacture: xinfang	Test Machine:GON-2000	Test Date: 2017-04-14 08:03:17

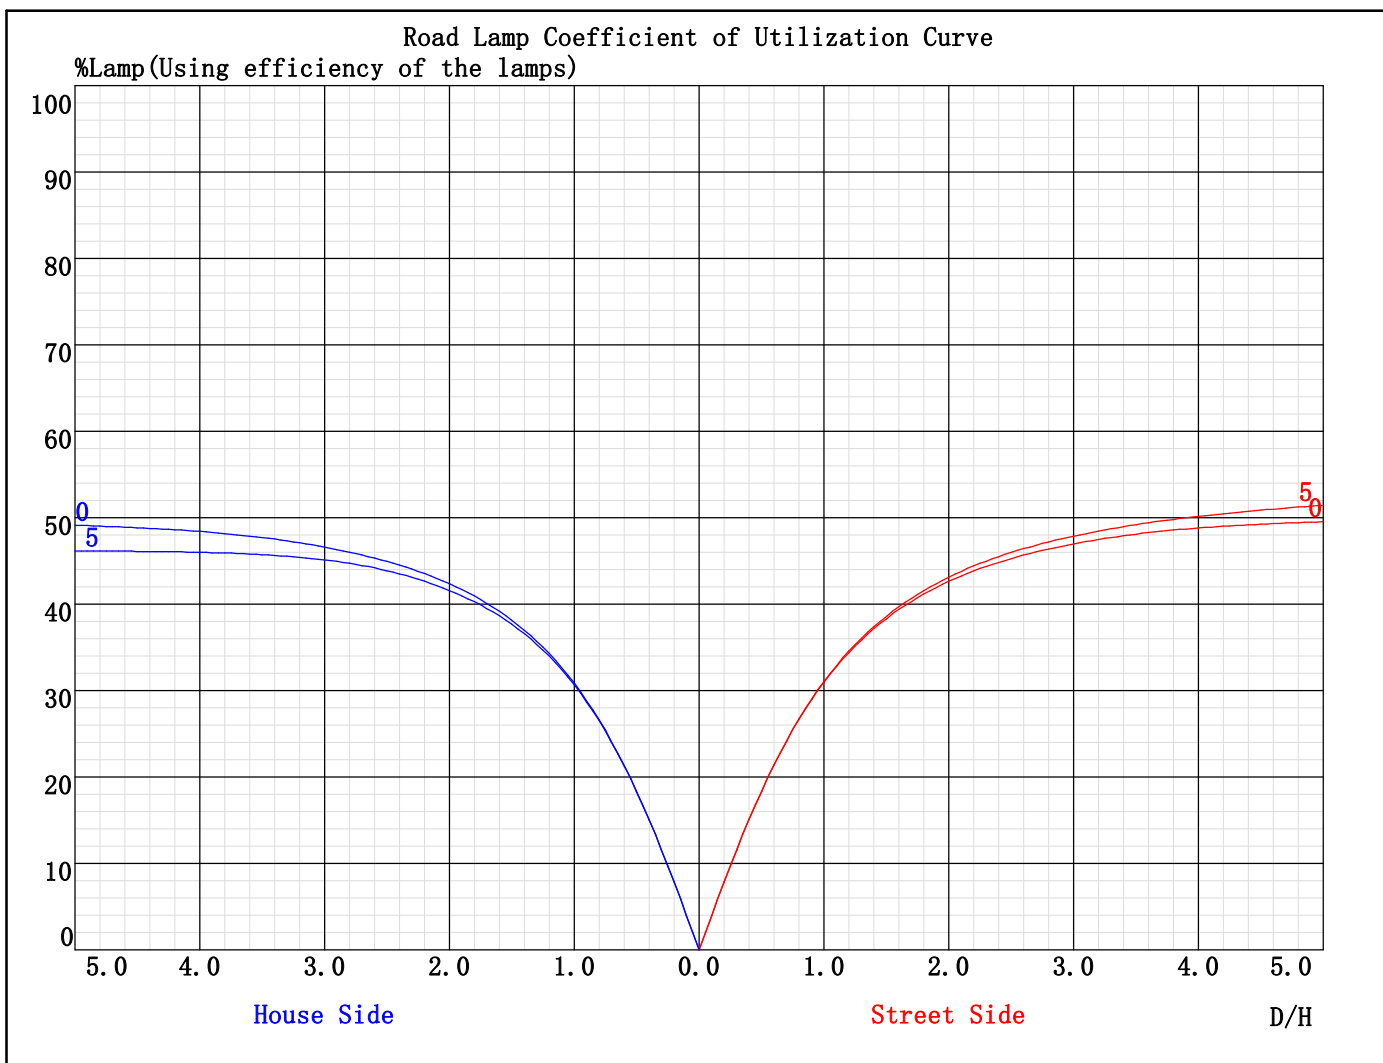

Tilt Angles: Ang1(deg): 0 Ang2(deg): 5

IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 0.0	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61	2138.61
γ 1.0	2168.60	2164.79	2159.25	2149.11	2137.23	2127.17	2118.06	2110.87	2108.00	2111.58	2117.51	2129.88
γ 2.0	2198.66	2189.13	2178.69	2160.98	2136.70	2114.07	2094.79	2080.93	2076.27	2081.66	2095.60	2118.62
γ 3.0	2226.10	2213.69	2196.03	2173.23	2137.70	2099.85	2070.24	2051.66	2042.48	2051.45	2071.71	2106.10
γ 4.0	2252.40	2236.43	2212.68	2184.25	2138.06	2084.39	2043.91	2020.75	2008.34	2020.68	2047.75	2092.73
γ 5.0	2276.24	2257.31	2229.66	2193.21	2134.19	2067.85	2017.13	1989.35	1974.90	1989.35	2023.82	2078.86
γ 6.0	2297.48	2276.19	2247.53	2200.92	2128.57	2051.36	1991.50	1956.33	1941.26	1957.85	1999.84	2064.68
γ 7.0	2318.61	2294.06	2263.07	2209.08	2123.36	2033.57	1964.66	1922.35	1905.30	1925.44	1973.59	2050.22
γ 8.0	2339.43	2312.29	2278.09	2216.55	2120.05	2014.81	1937.23	1889.36	1868.62	1891.65	1946.19	2035.04
γ 9.0	2359.00	2329.86	2292.95	2223.90	2116.29	1995.11	1910.29	1856.38	1832.29	1857.57	1919.58	2020.40
γ 10.0	2379.54	2346.91	2308.40	2231.81	2111.18	1975.90	1884.18	1821.85	1794.59	1823.42	1893.84	2005.99
γ 11.0	2400.49	2364.23	2322.74	2239.48	2105.81	1958.61	1857.16	1785.18	1753.84	1786.19	1867.63	1992.63
γ 12.0	2420.38	2382.76	2337.19	2249.03	2103.64	1942.60	1830.35	1746.50	1712.18	1748.24	1840.54	1979.14
γ 13.0	2437.27	2400.67	2352.56	2259.80	2102.41	1927.41	1802.78	1706.66	1673.12	1710.19	1813.80	1966.22
γ 14.0	2451.06	2417.51	2366.51	2271.37	2102.77	1914.85	1773.87	1668.97	1633.84	1674.05	1787.59	1953.61
γ 15.0	2463.08	2433.19	2380.86	2282.47	2104.89	1903.99	1745.02	1634.11	1598.43	1639.37	1762.40	1942.21
γ 16.0	2474.30	2448.72	2395.23	2293.34	2110.75	1893.78	1716.29	1601.22	1563.20	1604.57	1737.15	1932.49
γ 17.0	2486.42	2464.21	2408.28	2305.57	2120.16	1884.45	1688.72	1567.89	1530.17	1570.92	1712.04	1923.39
γ 18.0	2502.05	2480.05	2421.97	2320.30	2130.36	1876.68	1660.50	1534.86	1499.89	1539.04	1687.29	1917.19
γ 19.0	2519.46	2495.66	2435.35	2334.16	2139.66	1869.15	1632.20	1504.77	1470.10	1508.84	1663.62	1912.35
γ 20.0	2536.00	2509.56	2449.42	2348.58	2149.66	1862.35	1606.79	1476.21	1442.27	1479.37	1640.38	1907.76
γ 21.0	2551.09	2523.30	2463.05	2363.43	2161.06	1854.91	1582.58	1450.51	1416.87	1452.17	1616.58	1904.78
γ 22.0	2565.81	2536.79	2474.82	2378.64	2170.88	1847.80	1559.76	1425.59	1391.62	1427.29	1593.58	1901.16
γ 23.0	2581.21	2551.26	2486.45	2394.04	2180.87	1839.93	1537.67	1399.35	1364.37	1403.55	1570.91	1898.14
γ 24.0	2597.27	2565.11	2496.98	2409.11	2195.14	1832.00	1516.25	1373.53	1337.14	1380.11	1549.38	1895.53
γ 25.0	2613.11	2578.69	2507.85	2424.69	2205.79	1823.15	1495.45	1348.79	1311.58	1358.14	1528.78	1891.73
γ 26.0	2628.86	2591.60	2520.45	2439.62	2216.84	1814.75	1474.17	1324.73	1287.37	1335.47	1508.71	1886.21
γ 27.0	2642.44	2603.20	2531.30	2456.27	2230.51	1806.20	1454.35	1299.76	1264.13	1312.19	1487.58	1879.35
γ 28.0	2651.89	2612.41	2542.01	2473.78	2243.16	1797.44	1435.07	1274.43	1241.56	1288.10	1466.98	1873.56
γ 29.0	2659.84	2618.99	2551.71	2489.50	2253.80	1787.56	1417.85	1250.19	1219.65	1263.69	1448.09	1867.81
γ 30.0	2663.63	2621.75	2561.17	2505.76	2266.41	1777.28	1400.11	1226.14	1198.51	1239.08	1431.64	1861.76
γ 31.0	2662.48	2621.18	2569.32	2520.46	2279.15	1766.50	1383.09	1203.36	1177.68	1214.86	1416.66	1854.79
γ 32.0	2655.72	2617.69	2576.96	2533.15	2292.02	1753.78	1365.91	1180.29	1158.00	1193.18	1401.94	1845.86
γ 33.0	2646.30	2611.48	2583.37	2545.93	2305.49	1740.00	1349.89	1158.07	1136.40	1172.46	1386.96	1835.40
γ 34.0	2635.51	2602.45	2588.93	2558.85	2318.54	1726.90	1335.48	1136.61	1117.02	1153.30	1373.25	1823.06
γ 35.0	2621.30	2590.95	2592.95	2570.24	2331.37	1715.40	1320.76	1115.86	1097.08	1135.12	1359.72	1810.43
γ 36.0	2603.07	2578.76	2596.20	2581.15	2343.33	1703.85	1306.19	1096.01	1073.95	1117.31	1345.05	1796.90
γ 37.0	2582.97	2565.80	2597.99	2590.71	2355.21	1692.10	1290.09	1076.65	1049.11	1099.46	1330.23	1785.71
γ 38.0	2560.84	2552.30	2600.43	2599.80	2361.35	1681.38	1272.89	1055.70	1021.11	1081.00	1315.06	1773.85
γ 39.0	2535.77	2537.67	2601.46	2606.33	2367.52	1671.23	1256.05	1033.87	992.24	1061.83	1299.84	1763.64
γ 40.0	2508.37	2523.23	2601.63	2612.06	2373.15	1662.50	1239.59	1009.65	962.85	1039.38	1284.67	1754.45
γ 41.0	2479.85	2507.18	2600.15	2616.02	2372.83	1655.22	1223.86	984.50	934.77	1013.48	1270.77	1746.91
γ 42.0	2445.67	2489.55	2597.79	2619.92	2372.14	1648.66	1207.72	957.17	908.70	985.52	1256.94	1741.17
γ 43.0	2406.69	2472.57	2594.72	2621.86	2371.89	1641.79	1190.13	930.51	884.12	958.26	1242.69	1735.78
γ 44.0	2366.29	2451.03	2592.93	2624.15	2372.71	1634.26	1174.87	905.62	860.20	933.54	1228.50	1730.35

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 45.0	2323.16	2426.74	2591.68	2625.92	2373.48	1628.47	1159.36	883.35	835.78	910.05	1214.28	1724.25
γ 46.0	2279.26	2397.50	2590.08	2629.40	2374.28	1622.25	1143.80	862.51	814.10	887.46	1199.04	1717.56
γ 47.0	2230.73	2364.06	2586.54	2633.51	2377.90	1617.71	1126.90	842.97	794.01	867.29	1181.24	1712.51
γ 48.0	2176.95	2326.20	2582.01	2639.30	2381.58	1611.88	1107.20	823.01	774.71	847.15	1162.35	1706.36
γ 49.0	2122.96	2281.57	2576.21	2643.26	2379.64	1605.67	1086.91	804.31	756.31	825.75	1143.09	1699.94
γ 50.0	2069.04	2229.96	2568.59	2646.85	2377.62	1599.93	1066.03	785.91	738.03	805.30	1123.99	1694.08
γ 51.0	2006.99	2177.93	2557.16	2647.46	2376.18	1594.57	1046.04	767.26	718.12	785.54	1106.02	1688.52
γ 52.0	1940.29	2125.29	2541.20	2647.87	2373.26	1588.70	1026.92	750.33	696.23	767.01	1087.67	1683.26
γ 53.0	1871.31	2072.40	2520.92	2644.90	2365.32	1581.92	1009.97	733.62	673.50	749.61	1069.31	1677.09
γ 54.0	1796.97	2019.86	2496.27	2636.85	2355.32	1570.31	993.43	713.15	649.74	731.44	1051.01	1670.59
γ 55.0	1711.11	1965.12	2468.15	2627.40	2343.69	1560.62	976.63	691.28	626.97	712.23	1034.14	1663.43
γ 56.0	1607.90	1906.44	2432.78	2614.99	2336.98	1551.29	957.52	668.71	604.61	691.68	1017.04	1655.84
γ 57.0	1474.50	1845.54	2396.79	2602.09	2331.45	1543.22	937.48	647.36	583.56	669.27	1000.32	1651.18
γ 58.0	1311.66	1776.20	2356.92	2588.64	2329.58	1533.58	916.09	627.22	563.15	645.80	984.45	1644.29
γ 59.0	1129.22	1692.33	2316.85	2573.69	2324.67	1525.24	892.48	607.23	542.72	625.91	966.86	1634.56
γ 60.0	948.42	1590.59	2273.59	2555.50	2315.36	1516.91	869.01	588.57	518.47	607.69	947.65	1625.74
γ 61.0	780.66	1463.07	2227.03	2538.05	2307.11	1507.67	846.89	571.76	478.14	591.65	927.14	1615.90
γ 62.0	630.99	1314.10	2176.97	2518.63	2298.60	1499.40	827.11	553.54	406.06	575.09	906.57	1606.71
γ 63.0	479.37	1153.81	2124.15	2492.92	2283.66	1493.20	807.91	528.84	314.65	555.16	886.31	1595.10
γ 64.0	330.03	991.96	2068.46	2464.34	2269.32	1485.32	788.07	475.84	253.58	522.41	865.32	1585.76
γ 65.0	192.86	829.20	2009.77	2433.89	2256.23	1475.84	767.12	410.92	232.70	462.11	844.44	1577.69
γ 66.0	136.42	666.30	1944.95	2400.72	2246.80	1467.07	745.36	347.69	210.07	406.25	822.16	1565.48
γ 67.0	111.68	505.63	1871.03	2365.39	2237.93	1455.42	724.32	303.61	165.45	365.18	800.32	1551.61
γ 68.0	93.39	359.01	1781.55	2327.35	2228.30	1442.11	702.81	265.54	132.78	327.33	777.65	1539.15
γ 69.0	84.42	273.18	1678.98	2287.80	2218.24	1428.58	674.58	232.47	120.69	291.01	752.96	1525.66
γ 70.0	78.08	209.74	1556.86	2242.93	2201.06	1417.12	613.96	201.96	108.03	254.47	718.81	1514.30
γ 71.0	73.00	156.67	1418.03	2186.06	2179.92	1404.05	566.99	170.25	92.91	216.34	649.72	1504.33
γ 72.0	67.86	114.35	1262.63	2127.08	2135.70	1387.84	534.05	133.18	80.21	177.41	595.93	1494.42
γ 73.0	62.92	81.56	1093.38	2066.43	2047.78	1370.40	511.74	103.94	71.79	137.53	566.91	1487.22
γ 74.0	57.87	64.75	888.17	1998.35	1908.16	1353.77	486.16	89.82	66.59	109.25	550.28	1477.48
γ 75.0	49.39	56.01	746.36	1907.69	1643.80	1332.28	452.94	81.26	57.87	90.02	532.15	1456.81
γ 76.0	41.97	50.04	625.11	1707.38	1370.84	1293.03	379.16	73.05	47.84	80.36	498.25	1355.73
γ 77.0	36.97	44.27	476.95	1520.66	1122.11	1180.31	311.72	58.26	40.56	63.59	412.48	1252.22
γ 78.0	32.28	38.46	308.63	1300.11	978.12	1085.47	274.40	48.72	35.34	51.66	340.08	1161.63
γ 79.0	27.39	33.15	157.90	1069.96	820.11	926.58	235.72	42.70	30.35	46.48	258.25	1042.76
γ 80.0	21.16	27.95	96.05	841.69	605.86	663.59	153.36	37.01	24.17	41.48	149.68	802.39
γ 81.0	15.11	20.07	63.56	639.58	465.91	474.52	107.56	29.68	17.88	34.85	104.84	570.20
γ 82.0	6.74	11.57	37.25	462.33	335.28	357.81	70.45	22.95	12.79	28.80	73.65	364.05
γ 83.0	1.06	4.40	22.67	333.14	243.85	224.83	47.94	15.45	7.95	21.20	42.37	239.82
γ 84.0	0.46	1.30	11.74	215.85	145.40	125.05	31.77	7.83	3.90	11.28	27.25	146.81
γ 85.0	0.16	0.87	5.28	107.37	41.08	49.38	12.94	2.27	1.68	2.55	11.53	72.77
γ 86.0	0.00	0.36	3.16	24.99	12.77	19.06	3.65	1.52	1.17	1.99	3.96	15.24
γ 87.0	0.00	0.01	2.05	6.12	5.28	5.27	2.38	1.21	1.06	1.53	2.89	5.48
γ 88.0	0.00	0.00	0.84	3.99	4.33	3.83	1.93	0.86	0.79	1.33	2.44	4.18
γ 89.0	0.00	0.00	0.32	3.17	2.77	2.07	0.05	0.00	0.00	0.05	0.96	2.50

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 90.0	0.00	0.00	0.16	2.81	2.67	2.07	0.00	0.00	0.00	0.00	0.56	2.55
γ 91.0	0.00	0.00	0.15	2.61	2.67	2.02	0.00	0.00	0.00	0.00	0.61	2.55
γ 92.0	0.00	0.00	0.10	2.45	2.73	2.07	0.00	0.00	0.00	0.00	0.66	2.55
γ 93.0	0.00	0.00	0.05	2.35	2.73	2.07	0.00	0.00	0.00	0.00	0.72	2.70
γ 94.0	0.00	0.00	0.05	2.35	2.83	2.12	0.05	0.00	0.00	0.00	0.87	2.71
γ 95.0	0.00	0.00	0.05	2.25	2.78	2.22	0.16	0.00	0.00	0.00	0.97	2.86
γ 96.0	0.00	0.00	0.05	2.30	2.98	2.32	0.36	0.00	0.00	0.00	1.07	2.81
γ 97.0	0.00	0.00	0.10	2.09	3.08	2.43	0.51	0.00	0.00	0.00	1.32	2.86
γ 98.0	0.00	0.00	0.15	2.14	3.03	2.53	0.71	0.00	0.00	0.00	1.32	3.01
γ 99.0	0.00	0.00	0.25	2.09	3.13	2.58	0.82	0.00	0.00	0.00	1.58	3.06
γ 100.0	0.00	0.00	0.21	2.09	3.28	2.78	1.07	0.00	0.00	0.00	1.73	3.32
γ 101.0	0.00	0.00	0.36	2.09	3.43	2.83	1.17	0.00	0.00	0.00	1.93	3.27
γ 102.0	0.00	0.00	0.36	2.09	3.49	3.03	1.27	0.00	0.00	0.10	1.99	3.52
γ 103.0	0.00	0.00	0.36	2.09	3.74	3.13	1.48	0.00	0.00	0.21	2.14	3.57
γ 104.0	0.00	0.00	0.36	2.24	3.84	3.18	1.63	0.00	0.00	0.31	2.29	3.68
γ 105.0	0.00	0.00	0.46	2.29	3.89	3.33	1.68	0.20	0.00	0.46	2.29	4.03
γ 106.0	0.00	0.00	0.46	2.54	4.04	3.43	1.98	0.31	0.00	0.66	2.49	4.08
γ 107.0	0.00	0.00	0.61	2.75	4.09	3.59	1.98	0.46	0.00	0.77	2.49	4.29
γ 108.0	0.00	0.00	0.66	2.90	4.24	3.74	2.08	0.76	0.10	1.02	2.49	4.39
γ 109.0	0.00	0.00	0.76	2.86	4.24	3.84	2.13	0.82	0.26	1.12	2.60	4.59
γ 110.0	0.00	0.00	0.76	3.01	4.24	3.99	2.18	0.92	0.41	1.27	2.75	4.54
γ 111.0	0.00	0.00	0.81	3.11	4.29	3.99	2.24	1.12	0.61	1.38	2.80	4.54
γ 112.0	0.00	0.00	0.96	3.11	4.19	3.99	2.29	1.17	0.72	1.53	2.80	4.54
γ 113.0	0.00	0.00	0.97	3.16	4.19	3.99	2.39	1.17	0.92	1.63	2.95	4.54
γ 114.0	0.00	0.00	1.12	3.26	4.19	3.99	2.54	1.17	1.02	1.63	2.95	4.54
γ 115.0	0.00	0.05	1.17	3.37	4.24	3.94	2.69	1.17	1.28	1.63	3.00	4.59
γ 116.0	0.00	0.00	1.27	3.47	4.19	3.94	2.69	1.17	1.43	1.63	3.10	4.49
γ 117.0	0.00	0.05	1.22	3.47	4.09	3.94	2.80	1.43	1.68	1.68	3.05	4.23
γ 118.0	0.00	0.00	1.32	3.47	3.99	3.94	3.00	1.43	1.78	1.74	3.05	4.08
γ 119.0	0.00	0.10	1.32	3.57	3.93	3.99	2.95	1.84	1.83	1.99	3.05	4.03
γ 120.0	0.00	0.41	1.42	3.52	3.84	3.89	2.95	2.10	1.83	2.40	3.05	3.98
γ 121.0	0.30	0.46	1.47	3.52	3.83	3.84	2.95	2.50	2.15	2.75	3.05	3.93
γ 122.0	0.46	0.56	1.42	3.52	3.73	3.79	3.00	2.65	2.50	2.86	3.05	3.93
γ 123.0	0.56	0.66	1.42	3.52	3.68	3.79	2.95	2.80	2.70	2.96	3.05	3.93
γ 124.0	0.81	0.91	1.42	3.52	3.68	3.79	2.95	2.85	2.96	3.11	3.05	3.93
γ 125.0	0.96	1.12	1.42	3.52	3.68	3.79	2.90	3.01	3.01	3.16	3.15	3.88
γ 126.0	1.27	1.22	1.42	3.52	3.68	3.84	2.90	3.01	3.21	3.32	3.26	3.88
γ 127.0	1.27	1.22	1.42	3.52	3.68	3.73	2.90	3.21	3.41	3.47	3.31	3.87
γ 128.0	1.27	1.32	1.42	3.52	3.68	3.53	2.95	3.26	3.36	3.57	3.36	3.72
γ 129.0	1.42	1.38	1.42	3.37	3.68	3.48	2.89	3.42	3.57	3.67	3.41	3.62
γ 130.0	1.38	1.38	1.42	3.32	3.63	3.33	2.84	3.52	3.67	3.82	3.41	3.62
γ 131.0	1.53	1.38	1.42	3.11	3.63	3.28	2.84	3.52	3.87	3.82	3.41	3.57
γ 132.0	1.58	1.57	1.42	2.92	3.58	3.23	2.84	3.57	3.87	3.82	3.46	3.47
γ 133.0	1.63	1.63	1.42	2.91	3.58	3.23	2.89	3.67	3.93	3.82	3.25	3.42
γ 134.0	1.58	1.58	1.42	2.86	3.53	3.23	2.84	3.62	4.08	3.82	3.20	3.42

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 135.0	2.03	1.78	1.42	2.86	3.53	3.23	2.79	3.67	4.18	3.82	3.05	3.42
γ 136.0	2.14	1.83	1.42	2.86	3.58	3.23	2.74	3.72	4.28	3.82	2.90	3.42
γ 137.0	2.34	1.78	1.42	2.86	3.38	3.23	2.59	3.77	4.48	3.82	2.95	3.42
γ 138.0	2.49	1.78	1.42	2.86	3.33	3.23	2.59	3.77	4.43	3.77	2.90	3.42
γ 139.0	2.35	1.99	1.42	2.86	3.33	3.23	2.59	3.77	4.38	3.77	2.90	3.42
γ 140.0	2.39	1.94	1.42	2.86	3.33	3.23	2.59	3.77	4.38	3.82	2.90	3.42
γ 141.0	2.75	2.04	1.42	2.76	3.33	3.23	2.59	3.77	4.43	3.82	2.90	3.46
γ 142.0	2.75	1.99	1.37	2.70	3.33	3.28	2.64	3.77	4.48	3.82	2.90	3.27
γ 143.0	2.80	1.99	1.42	2.60	3.38	3.23	2.69	3.77	4.53	3.82	3.05	3.27
γ 144.0	2.85	1.99	1.37	2.60	3.18	3.18	2.69	3.77	4.48	3.82	3.16	3.26
γ 145.0	2.80	2.04	1.37	2.50	3.18	3.18	2.69	3.77	4.48	3.82	3.31	3.21
γ 146.0	2.85	2.09	1.37	2.50	3.18	3.18	2.80	3.77	4.48	3.82	3.41	3.21
γ 147.0	2.85	2.14	1.32	2.50	3.18	3.18	2.95	3.77	4.48	3.82	3.62	3.11
γ 148.0	2.85	2.09	1.42	2.50	3.18	3.18	3.00	3.77	4.43	3.82	3.81	3.10
γ 149.0	2.90	2.09	1.62	2.50	3.18	3.18	3.00	3.77	4.43	3.82	3.76	2.30
γ 150.0	2.85	2.09	1.83	2.50	3.13	3.13	3.00	3.82	4.48	3.82	3.76	3.01
γ 151.0	4.92	2.09	2.08	2.50	3.03	3.13	3.00	3.72	4.37	3.82	3.76	3.01
γ 152.0	3.19	2.14	2.08	2.50	2.98	3.13	3.00	3.62	3.92	3.77	3.76	3.01
γ 153.0	3.06	2.09	2.08	2.50	2.98	3.13	3.00	3.41	3.87	3.77	3.71	3.01
γ 154.0	3.06	2.19	2.18	2.50	2.93	3.13	2.99	3.36	3.77	3.77	3.66	3.01
γ 155.0	2.96	2.14	2.24	2.60	2.88	3.13	2.90	3.31	3.77	3.72	3.66	3.01
γ 156.0	2.90	2.14	2.24	2.65	2.83	3.13	2.90	3.31	3.72	3.67	3.56	3.01
γ 157.0	2.85	2.14	2.24	2.80	2.77	3.03	2.90	3.31	3.57	3.67	3.56	3.01
γ 158.0	2.80	2.19	2.34	2.81	2.62	2.98	2.89	3.26	3.36	3.51	3.46	2.91
γ 159.0	2.80	2.24	2.34	2.81	2.68	3.03	2.79	3.26	3.31	3.36	3.40	2.91
γ 160.0	2.80	2.24	2.34	2.76	2.73	2.88	2.79	3.26	3.31	3.36	3.30	2.91
γ 161.0	2.80	2.39	2.44	2.76	2.88	2.78	2.79	3.26	3.31	3.31	3.30	2.96
γ 162.0	2.75	2.45	2.59	2.76	2.98	2.78	2.79	3.26	3.31	3.26	3.25	2.91
γ 163.0	2.75	2.45	2.75	2.76	3.13	2.78	2.79	3.26	3.31	3.26	3.25	3.01
γ 164.0	2.70	2.55	2.84	2.76	3.13	2.78	2.79	3.26	3.31	3.26	3.25	3.11
γ 165.0	2.70	2.65	2.85	2.71	3.13	2.83	2.79	3.26	3.31	3.31	3.25	3.06
γ 166.0	2.70	2.85	2.85	2.70	3.13	2.88	2.84	3.27	3.36	3.26	3.31	3.07
γ 167.0	2.70	2.90	2.90	2.70	3.38	3.28	2.85	3.43	3.43	3.42	3.51	3.33
γ 168.0	2.75	3.15	3.05	2.70	3.38	3.34	3.16	3.88	3.83	3.84	3.82	3.73
γ 169.0	2.85	3.26	3.20	2.75	3.49	3.48	3.35	4.13	4.09	4.18	4.02	3.93
γ 170.0	3.35	3.46	3.50	2.96	3.89	3.59	3.51	4.18	4.39	4.43	4.17	3.93
γ 171.0	3.51	3.52	3.56	2.96	3.94	3.84	3.71	4.28	4.53	4.54	4.17	3.93
γ 172.0	3.62	3.62	3.61	2.96	3.94	3.84	3.66	4.27	4.43	4.54	4.17	3.98
γ 173.0	3.72	3.62	3.61	3.06	3.94	3.84	3.66	4.08	4.43	4.59	4.07	3.93
γ 174.0	3.82	3.67	3.61	3.01	3.94	3.89	3.66	4.13	4.38	4.48	4.02	3.88
γ 175.0	3.92	3.67	3.76	3.01	3.94	3.79	3.66	4.07	4.28	4.43	4.01	3.88
γ 176.0	4.02	3.77	3.86	3.06	3.94	3.78	3.66	3.97	4.13	4.18	3.81	3.88
γ 177.0	4.03	3.77	3.86	3.16	3.84	3.64	3.66	3.87	3.87	4.13	3.86	3.83
γ 178.0	4.13	3.77	3.86	3.16	3.68	3.68	3.66	3.82	3.72	4.08	3.81	3.78
γ 179.0	4.08	3.77	3.81	3.16	3.68	3.63	3.71	3.82	3.67	4.08	3.76	3.78

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5	C225.0	C247.5
γ 180.0	4.03	4.03	4.03	4.03	4.03	4.03	4.03	4.03	4.03	4.03	4.03	4.03
V/H	C270.0	C292.5	C315.0	C337.5								
γ 0.0	2138.61	2138.61	2138.61	2138.61								
γ 1.0	2138.89	2148.78	2158.01	2165.15								
γ 2.0	2137.30	2158.09	2176.51	2188.98								
γ 3.0	2136.40	2166.74	2194.27	2211.42								
γ 4.0	2135.44	2175.17	2210.80	2234.96								
γ 5.0	2133.95	2182.65	2226.30	2258.23								
γ 6.0	2132.82	2189.26	2242.71	2281.11								
γ 7.0	2133.33	2197.75	2258.39	2302.04								
γ 8.0	2134.03	2206.97	2274.32	2320.39								
γ 9.0	2134.49	2215.19	2289.76	2337.06								
γ 10.0	2133.23	2224.57	2305.10	2354.36								
γ 11.0	2132.80	2236.11	2319.39	2371.34								
γ 12.0	2132.44	2248.24	2332.37	2388.36								
γ 13.0	2133.29	2260.42	2345.68	2404.57								
γ 14.0	2134.40	2272.06	2359.17	2419.71								
γ 15.0	2136.46	2283.98	2372.64	2432.79								
γ 16.0	2142.18	2294.40	2386.50	2444.64								
γ 17.0	2148.87	2306.04	2400.40	2457.48								
γ 18.0	2156.73	2316.40	2413.91	2470.51								
γ 19.0	2166.96	2327.81	2426.93	2482.39								
γ 20.0	2177.94	2338.52	2440.34	2496.55								
γ 21.0	2188.56	2350.07	2454.92	2512.91								
γ 22.0	2199.81	2362.55	2467.52	2530.28								
γ 23.0	2214.03	2376.32	2479.29	2546.53								
γ 24.0	2226.06	2390.51	2489.35	2559.90								
γ 25.0	2238.55	2404.90	2498.21	2570.37								
γ 26.0	2251.30	2419.69	2507.83	2581.01								
γ 27.0	2262.29	2433.08	2517.00	2592.86								
γ 28.0	2275.66	2444.73	2525.46	2602.85								
γ 29.0	2288.19	2455.26	2534.56	2610.66								
γ 30.0	2299.93	2462.33	2543.90	2614.95								
γ 31.0	2312.60	2469.71	2551.51	2615.11								
γ 32.0	2324.70	2478.61	2556.48	2614.30								
γ 33.0	2336.58	2486.11	2558.92	2611.64								
γ 34.0	2350.69	2494.98	2559.46	2605.09								
γ 35.0	2363.96	2503.40	2557.16	2594.73								
γ 36.0	2377.10	2510.79	2552.81	2580.77								
γ 37.0	2389.85	2520.91	2546.52	2562.81								
γ 38.0	2401.56	2529.19	2539.24	2542.64								
γ 39.0	2411.98	2535.80	2530.80	2522.28								
γ 40.0	2418.72	2539.89	2524.05	2500.65								
γ 41.0	2422.13	2543.99	2517.98	2476.53								
γ 42.0	2423.60	2549.75	2513.74	2450.37								

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 43.0	2423.67	2558.38	2511.25	2422.55
γ 44.0	2423.08	2563.32	2507.26	2394.45
γ 45.0	2421.01	2564.59	2504.02	2363.69
γ 46.0	2421.29	2565.92	2498.38	2328.05
γ 47.0	2419.08	2567.00	2491.36	2286.60
γ 48.0	2416.93	2568.03	2485.75	2242.60
γ 49.0	2413.05	2568.43	2475.45	2189.76
γ 50.0	2410.75	2564.74	2460.37	2135.16
γ 51.0	2406.58	2559.66	2441.21	2079.93
γ 52.0	2405.26	2552.11	2413.93	2025.97
γ 53.0	2400.42	2541.26	2384.86	1971.07
γ 54.0	2394.58	2527.92	2355.67	1915.76
γ 55.0	2389.27	2513.60	2321.84	1858.31
γ 56.0	2383.60	2499.60	2284.69	1798.72
γ 57.0	2378.59	2482.32	2246.22	1729.39
γ 58.0	2373.91	2463.26	2206.72	1639.49
γ 59.0	2367.79	2441.51	2165.05	1529.62
γ 60.0	2359.45	2417.65	2121.28	1391.49
γ 61.0	2351.47	2390.47	2070.04	1235.51
γ 62.0	2342.71	2361.84	2011.77	1063.95
γ 63.0	2331.19	2334.29	1948.51	900.78
γ 64.0	2318.01	2309.03	1875.64	736.28
γ 65.0	2305.56	2279.68	1792.52	588.16
γ 66.0	2293.04	2245.61	1697.78	447.95
γ 67.0	2283.14	2206.64	1587.07	316.11
γ 68.0	2273.12	2163.84	1458.13	229.89
γ 69.0	2265.73	2118.52	1320.89	169.38
γ 70.0	2257.18	2068.10	1182.84	122.97
γ 71.0	2243.60	2015.65	1031.30	91.69
γ 72.0	2211.27	1955.25	876.19	74.49
γ 73.0	2127.25	1899.73	712.18	66.45
γ 74.0	1962.33	1834.93	606.94	60.35
γ 75.0	1645.87	1759.79	514.71	54.76
γ 76.0	1354.46	1589.61	400.84	48.49
γ 77.0	1096.38	1387.17	298.48	41.87
γ 78.0	966.05	1192.71	199.77	36.75
γ 79.0	812.27	1021.18	97.75	32.49
γ 80.0	557.81	771.91	52.37	25.88
γ 81.0	375.14	562.60	35.16	17.32
γ 82.0	240.71	389.70	26.17	9.30
γ 83.0	153.69	220.85	15.87	2.64
γ 84.0	74.88	108.81	7.11	1.03
γ 85.0	18.05	41.53	3.24	0.62
γ 86.0	7.64	10.97	2.59	0.17
γ 87.0	5.44	5.07	1.63	0.01

IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C270. 0	C292. 5	C315. 0	C337. 5
γ 88. 0	4. 49	3. 42	0. 66	0. 00
γ 89. 0	3. 31	2. 74	0. 36	0. 00
γ 90. 0	3. 18	2. 58	0. 21	0. 00
γ 91. 0	3. 08	2. 38	0. 10	0. 00
γ 92. 0	2. 98	2. 37	0. 05	0. 00
γ 93. 0	2. 98	2. 22	0. 05	0. 00
γ 94. 0	2. 98	2. 22	0. 05	0. 00
γ 95. 0	2. 98	2. 17	0. 05	0. 00
γ 96. 0	2. 98	2. 12	0. 05	0. 00
γ 97. 0	3. 03	2. 02	0. 05	0. 00
γ 98. 0	3. 28	1. 97	0. 05	0. 00
γ 99. 0	3. 43	1. 97	0. 05	0. 00
γ 100. 0	3. 53	1. 97	0. 05	0. 00
γ 101. 0	3. 63	2. 02	0. 10	0. 00
γ 102. 0	3. 83	2. 07	0. 10	0. 00
γ 103. 0	4. 18	2. 02	0. 20	0. 00
γ 104. 0	4. 24	2. 07	0. 30	0. 00
γ 105. 0	4. 44	2. 27	0. 46	0. 00
γ 106. 0	4. 64	2. 47	0. 41	0. 00
γ 107. 0	4. 69	2. 67	0. 41	0. 00
γ 108. 0	4. 84	2. 82	0. 46	0. 00
γ 109. 0	5. 14	2. 83	0. 46	0. 00
γ 110. 0	5. 10	2. 83	0. 51	0. 00
γ 111. 0	5. 25	2. 93	0. 61	0. 00
γ 112. 0	5. 30	2. 98	0. 66	0. 00
γ 113. 0	5. 30	3. 03	0. 71	0. 00
γ 114. 0	5. 30	3. 18	0. 81	0. 00
γ 115. 0	5. 35	3. 13	0. 81	0. 00
γ 116. 0	5. 35	3. 13	1. 11	0. 00
γ 117. 0	5. 35	3. 13	1. 17	0. 00
γ 118. 0	5. 35	3. 13	1. 27	0. 00
γ 119. 0	5. 35	3. 13	1. 22	0. 05
γ 120. 0	5. 35	3. 13	1. 37	0. 36
γ 121. 0	5. 35	3. 13	1. 32	0. 46
γ 122. 0	5. 35	3. 13	1. 32	0. 46
γ 123. 0	5. 35	3. 13	1. 32	0. 66
γ 124. 0	5. 35	3. 13	1. 32	0. 66
γ 125. 0	5. 40	3. 13	1. 32	0. 66
γ 126. 0	5. 30	3. 13	1. 32	1. 01
γ 127. 0	5. 25	3. 13	1. 32	1. 02
γ 128. 0	5. 25	3. 13	1. 32	1. 22
γ 129. 0	5. 25	3. 13	1. 32	1. 17
γ 130. 0	5. 15	3. 03	1. 32	1. 17
γ 131. 0	5. 00	2. 98	1. 32	1. 17
γ 132. 0	4. 74	2. 88	1. 32	1. 37

IES Road Report
Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 133.0	4.69	2.68	1.32	1.43
γ 134.0	4.64	2.73	1.32	1.43
γ 135.0	4.40	2.73	1.32	1.48
γ 136.0	4.44	2.63	1.32	1.58
γ 137.0	4.39	2.63	1.32	1.63
γ 138.0	4.29	2.63	1.32	1.68
γ 139.0	4.14	2.58	1.32	1.98
γ 140.0	4.09	2.57	1.32	1.99
γ 141.0	4.14	2.53	1.32	2.04
γ 142.0	3.99	2.33	1.32	2.09
γ 143.0	3.89	2.17	1.42	2.04
γ 144.0	3.84	2.17	1.42	2.04
γ 145.0	3.84	2.02	1.42	2.04
γ 146.0	3.79	2.07	1.57	2.04
γ 147.0	3.69	1.97	1.68	2.04
γ 148.0	3.63	1.97	1.93	2.04
γ 149.0	3.54	1.97	2.03	2.04
γ 150.0	3.53	1.97	2.03	2.04
γ 151.0	3.43	1.97	2.13	2.09
γ 152.0	3.38	1.97	2.18	2.09
γ 153.0	3.13	1.97	2.33	2.09
γ 154.0	3.08	1.97	2.48	2.24
γ 155.0	2.78	1.97	2.54	2.19
γ 156.0	2.83	2.02	2.59	2.19
γ 157.0	2.78	2.12	2.74	2.19
γ 158.0	2.68	2.12	2.74	2.19
γ 159.0	2.67	2.17	2.74	2.24
γ 160.0	2.72	2.27	2.79	2.29
γ 161.0	2.77	2.32	2.84	2.39
γ 162.0	2.83	2.37	2.89	2.39
γ 163.0	2.88	2.42	2.99	2.39
γ 164.0	2.88	2.37	2.95	2.49
γ 165.0	2.88	2.52	2.95	2.50
γ 166.0	2.88	2.52	2.95	2.50
γ 167.0	2.93	2.72	3.00	2.55
γ 168.0	2.98	2.82	3.20	2.70
γ 169.0	3.03	2.83	3.45	3.10
γ 170.0	3.13	2.88	3.60	3.41
γ 171.0	3.33	2.98	3.71	3.56
γ 172.0	3.43	3.03	3.76	3.67
γ 173.0	3.58	3.28	3.81	3.67
γ 174.0	3.63	3.43	3.81	3.67
γ 175.0	3.58	3.68	3.86	3.67
γ 176.0	3.68	3.69	3.91	3.67
γ 177.0	3.63	3.69	3.96	3.67

IES Road Report

Photometric Filename:60W-120V_IESNA2002.IES

Candela Tabulation - (Cont.)

V/H	C270.0	C292.5	C315.0	C337.5
γ 178.0	3.63	3.74	3.91	3.67
γ 179.0	3.58	3.79	3.91	3.67
γ 180.0	4.03	4.03	4.03	4.03

